


FIREEYE BIKES WHEELBUILDING INFO

FOR EXCELERANT 28 RIM

EXCELERANT 28 RIM DRAWING:

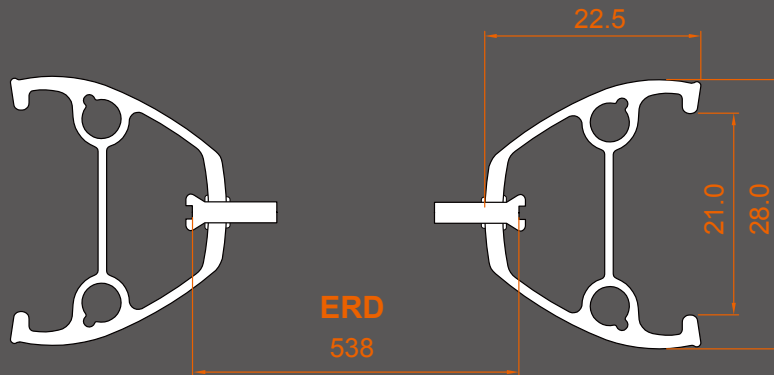

EXCELERANT RIM SPEC:

RIM MODELS	SIZE	WIDTH	HOLES	ERD
EXCELERANT 26 RIM	26"	26mm	32	535mm
EXCELERANT 28 RIM	26"	28mm	32 or 36	538mm
EXCELERANT 36 RIM	26"	36mm	32 or 36	541mm
EXCELERANT 2925 RIM	29"	25mm	32	603mm
EXCELERANT 2928 RIM	29"	28mm	32	593mm

WHEEL SET SPOKES LENGTH:

SPOKES		RIMS	EXCELERANT 26 RIM		EXCELERANT 28 RIM		EXCELERANT 36 RIM		EXCELERANT 2925 RIM		EXCELERANT 2928 RIM									
			32H		32H	36H	32H	36H	32H	36H	32H	36H								
FRONT HUBS	F91520	258 / 260	/	/	/	/	/	/	/	/	/	/								
	F91520T																			
	F915																			
	F915T																			
	F920																			
	F920T																			
	F1520																			
	F5												258 / 260	258 / 262	260 / 264	292 / 294	286 / 290			
	F9												258 / 260	258 / 262	260 / 264	292 / 294	286 / 290			
	F15												258 / 260	258 / 262	260 / 264	292 / 294	286 / 290			
	F20												258 / 260	258 / 262	260 / 264	292 / 294	286 / 290			
	F9NDS												260 / 260	262 / 262	264 / 264	294 / 294	290 / 290			
F20NDS	260 / 260	262 / 262	264 / 264	294 / 294	288 / 288															
REAR HUBS	R5	258 / 258	/	/	/	/	/	/	/	/	/	/								
	R10																			
	R10T												262 / 260	256 / 256	262 / 260	258 / 258	292 / 292	288 / 288	288 / 286	284 / 284
	R12																			
	R12142																			
	R12150												260 / 260	262 / 262	262 / 262	294 / 294	288 / 288			
	RS10												258 / 260	260 / 262	260 / 264	292 / 294	288 / 290			
RS10DU																				

All values are in mm, and all intersections are 3. This chart is for your reference only as our spoke lengths are all in even numbers and we rounded off the values to the nearest whole millimeter. Feel free to check out the spec and do your own calculations.